



6.USB-A /USB-C Output

Plug in your device to USB-A or USB-C output socket.It will automatical start to output.If it did not, please press and hold the button 2 seconds to power on.

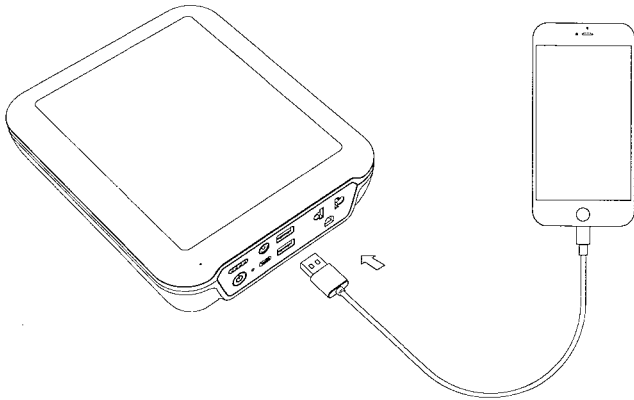

7.DC Jack Output

- 1.Turn on main power
- 2.Plug in DC output port
- 3.Output power (based on different verison):
Version 1: 12V/10(max)
Version 2: 24V/5A(max)

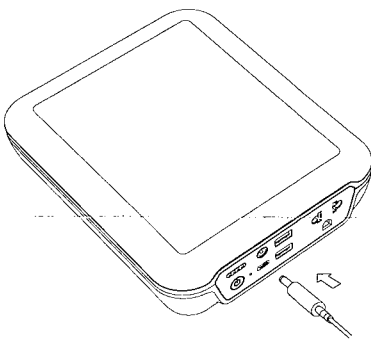

8.LED Indicator

There are four LED indicators to display the battery level status of the portable power station.When being recharged, the LED indicators will light up based on the current battery level:

Charging: (✕ :LED flashes; ○ : LED is off; ● : LED is on)

Battery Status Indicator	Battery Level
✕ ○ ○ ○	0% - 25%
● ✕ ○ ○	26% - 50%
● ● ✕ ○	51% - 75%
● ● ● ✕	76% - 99%
● ● ● ●	100%

When devices are connected, the LED indicators will light up as follows:

(✕ :LED flashes; ○ : LED is off; ● : LED is on)


Battery Status Indicator	Battery Level
● ● ● ●	100% - 75%
● ● ● ○	75% - 50%
● ● ○ ○	50% - 25%
● ○ ○ ○	25% - 10%
✕ ○ ○ ○	≤10%

* Low Battery: When the battery is lower than 10%, the 1st LED will be blinking. Output for the USB port and AC output will automatically stop working when battery is empty.


9.Caution




- 1.Do not cover anything on the unit when you`re using.

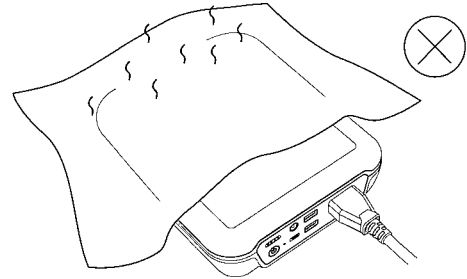

- 2.Do not use in rain or in any other situations can get the power station wet.
- 3.Please keep away from fire and children.

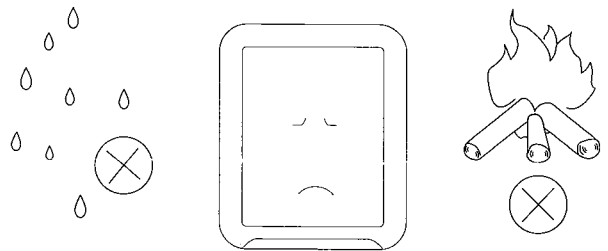

- 4.Please do not disassemble the product.

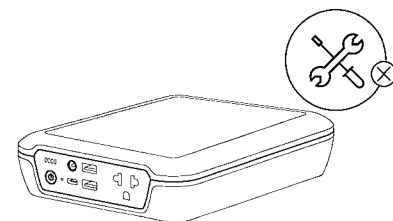

- 5.Fully charge the power station before long time storage. Check the battery level every 3 months.
6. When not in use, make sure to turn off the power station to save battery energy.
7. Please do not leave the power station in situations where it can reach extreme temperatures exceeding 50 C such as inside a vehicle.

